


	SCHEDE TECNICHE / TECHNICAL SPECIFICATIONS	ST347	Autore ASC
	SICLA 4 GAMBE SICLA 4 LEGS	Rev. 00	Data 23/04/19
			Pag. 1 di 1



<p>Scocca</p> <p><i>Shell</i></p>	<ul style="list-style-type: none"> • Polipropilene + Fibra vetro. • <i>Polypropylene + Glass fiber.</i>
<p>Caratteristiche telaio</p> <p><i>Frame specifications</i></p>	<ul style="list-style-type: none"> • Fianchi in tubo tondo diametro 18 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. • Supporto seduta in tubo tondo diametro 16 mm, spessore 2 mm, secondo norma UNI EN 10305-3 in Asform. • <i>Sides in round tube diameter 18 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.</i> • <i>Seat support in round tube diameter 16 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.</i>
<p>Finitura</p> <p><i>Finishing</i></p>	<ul style="list-style-type: none"> • Telaio cromato con spessore medio 5 μ. • Telaio verniciato con polveri epossi-poliestere spessore medio 50 μ. • <i>Chrome plating with medium thickness 5 μ.</i> • <i>Painted frame with epoxy-polyester powder with average thickness of 50 μ.</i>
<p>Piedini</p> <p><i>Gliders</i></p>	<ul style="list-style-type: none"> • Polipropilene. • <i>Polypropylene.</i>
<p>Optional</p> <p><i>Optional</i></p>	<ul style="list-style-type: none"> • Pannello seduta in legno multistrato di faggio, spessore 5,5 mm, tappezzato. • Scocca integrale in polipropilene tappezzata. • <i>Wood seat panel in plywood beech, 5,5 mm thickness, upholstered.</i> • <i>Polypropylene full upholstered shell.</i>

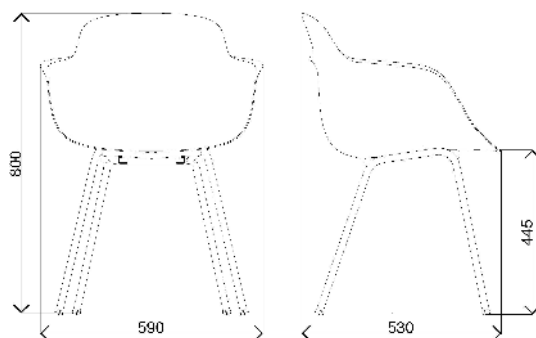

Frame - Steel



01
Chromium
plated



31
Matt black



30
Matt white

Shell - Polyproylene



S011
Anthracite



R8022
Coal black



S513
Military green



S503
Powder blue



S514
Sand



S020
White

Upholstery

Byte

Canvas 2

Divina 3

Divina Melange 3

Eco Leather

Field 2

Fiord

Flash No - Shrink

Full grain leather

Glow

Harald 3

Patina

Revive 1

Steelcut Trio 3

Step

Step melange