


SKOL  
5102-4LGP / 5102-O4LP  
Design Needs Studio

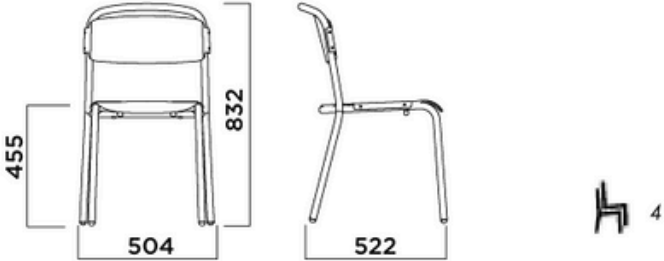

FRAME

TELAIO  
BASTIDOR

Round tube diameter 25 mm, thickness 1.5 mm, accordingly Uni En 10305-3  
Struttura in tubo tondo diametro 25 mm, spessore 2 mm, secondo norma UNI EN10305-3.  
Tubo redondo de 25 mm de diámetro, 2 mm de espesor, conforme a la norma UNI EN 10305-3.



OUTDOOR FRAME

TELAIO OUTDOOR  
BASTIDOR PARA  
EXTERIORES

Epoxy-polyester powder painted frame for outdoor, average thickness 50 µ.  
Telaio per esterno verniciato a polveri epossipoliestere spessore medio 50 µ.  
Estructura pintada epoxy para exteriores, espesor medio de 50 µ.



SEAT AND BACKREST

SEDUTA E SCHIENALE  
ASIENTO Y RESPALDO

Post consumer industrial Polypropylene + Glass Fiber  
Plastica post consumo industriale + Fibra di vetro  
Plástico industrial posconsumo + Fibra de vidrio



Polypropylene + Glass Fiber  
Polipropilene + Fibra di vetro  
Polipropileno + Fibra de vidrio



FINISHING

FINITURA  
ACABADO

Painted frame with epoxy-polyester powder with average thickness of 50 µ. Chrome plated frame with average thickness of 5 µ.  
Telaio verniciato con polveri epossipoliestere spessore medio di 50 µ. Telaio cromato con spessore medio 5 µ.  
Bastidor con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio. Bastidor cromado con 5 µ de espesor medio

PKG  
IMBALLO  
EMBALAJE

| Pkg | A(cm) | B(cm) | h(cm) | MC | PCS | Weight (kg) |
|-----|-------|-------|-------|----|-----|-------------|
| 71  | 59    | 102.5 | 0.43  | 4  | 24  |             |