


RELIEF swivel with castors
5036-4SCP
Design Favaretto&Partners



BASE AND SUPPORT
BASE E SUPPORTO
BASE AND SUPPORT

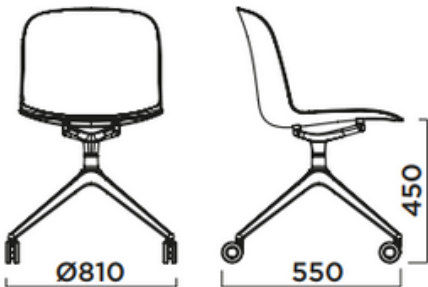

00L

Polished aluminium 4 star base
Base 4 rozze alluminio pulito.
Base de aluminio pulido de 4 radios



30



31

SHELL
SCocca
CARCASA

Polypropylene + Glass fiber
Polipropilene + Fibra di vetro
Polipropileno + Fibra de vidrio



S020



R8022



S007



S503



S514



S529



R6013

SUPPORT
SUPPORTO
SOPORTE

Polished die casting aluminium
Alluminio presso fuso pulito.
Aluminio fundido a presión pulido

CASTORS
RUOTE
RUEDAS PIVOTANTES

Perforated castors diam. 60 stem 11.
Ruote forate diametro 60 perno 11.
Ruedas pivotantes perforadas diám. 60 perno 11.

FEATURES
CARATTERISTICHE
CARACTERÍSTICAS

Painted aluminium base and support with epoxy-polyester powder with average thickness of 50 µ.
Base e supporto in alluminio verniciato a polvere epossipoliesteri con spessore medio di 50 µ.
Base y soporte de aluminio con recubrimiento en polvo epoxi-poliéster con 50 µ de espesor medio.

CERTIFICATIONS
CERTIFICAZIONI
CERTIFICADOS



PKG
IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
59	63	85,5	0.32	1	12,82	